



## GPS/DGPS/WAAS VIDEO PLOTTER

with integral Echo Sounder

Models **GP-3500/3500F**

- Accuracy enhanced with built-in SBAS (WAAS/EGNOS/MSAS)
- 10.4" high-definition TFT LCD for optimum viewing during daytime and nighttime
- Display of ship's tracks, waypoints and planned route on a precision electronic chart
- Dual interchangeable Card Slot Works with C-MAPNT Charts or NAVIONICS® Nav-Charts™/FURUNO MiniCharts
- Display modes including:
  - Course Plot
  - Nav Data
  - Compass
- Stores up to 80,000 ship's tracks and marks, 3,500 waypoints, 200 planned routes
- 50/200 kHz dual-frequency echo sounder, selection of 600 W or 1 kW (GP-3500F)
- Optional MiniMemory Card for storage of ship's tracks and marks
- Remote Controller available as option

Low-profile, space-saving display unit with GPS/SBAS combo antenna





## User friendly key arrangement and menu structure give straightforward operation for a wide variety of fishing vessels

The GP-3500 series is Furuno's new high performance GPS/DGPS/WAAS VideoPlotter designed for a wide variety of fishing vessels and pleasure craft. The compact, 12-channel antenna unit offers extremely accurate position fixes - 10 m for the basic GPS, 5 m for the DGPS and 3 m where SBAS (WAAS/EGNOS/MSAS) is available.

The all-new processor ensures high-speed updating of graphic presentations including the electronic chart, the vessel's position and motion trend vector, track, waypoints, and so forth. Up to 80,000 ship's tracks, 3,500 waypoints and 200 planned routes can be stored in the internal memory.

Dual interchangeable card slot for chart and memory cards are provided on the front panel. The cartography is selectable among C-MAPNT Chart or Navionics® NavChart™/Furuno MiniChart containing accurate coastlines, depth contours, place names, aids to navigation such as buoys, lighthouses, and other navigational marks.

The GP-3500F employs the dual frequency 50/200 kHz sounding module as standard. It presents detailed information on fish, fish schools and bottom. The range can be changed manually or automatically. When the range is changed, an entire echogram will be redrawn so that the contour line can be shown seamlessly. The GP-3500F incorporates unique target position output feature. It outputs the Lat/Lon position and depth of a target specified by cursor and temperature data (when a temperature sensor is connected) to the plotter display as a mark. The information is also stored in the internal memory.

Operation is simple and straightforward by using softkeys, enter knob and trackball. You can operate the navigator with great comfort thanks to its user-friendly design.



**Actual Size**


WIDE:310 mm, HIGH:337 mm, DEPTH:120 mm

## Variety of display modes

### Course Plot




TM North-up mode

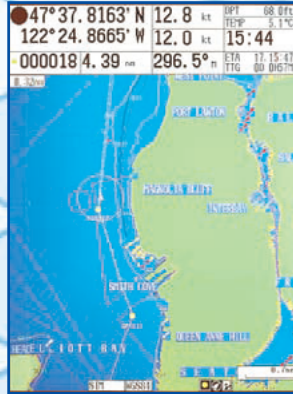


Course-up mode



### Compass

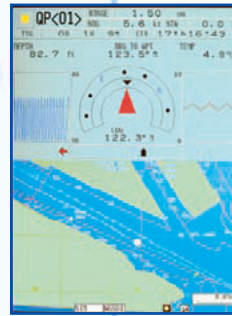

### Echo Sounder\*




### Combination of Course Plot and Echo Sounder\*



\*GP-3500F only


### Selection of display modes




Mode selection is quite easy; push the "DISP" button and select the mode icon by using the "Enter knob". Up to 36 display modes including combination mode are available. The combination mode can be mixed and matched from primary display modes. The primary display modes consist of course plot, compass and sounding (GP-3500F only) mode. If those weren't enough, the operator can arrange the display layout in the menu.

### Echo Sounder Display (GP-3500F)

The GP-3500F incorporates a dual-frequency, 600 W or 1 kW sounding transceiver. Acoustical pulses are emitted from the transducer fitted on the boat hull and echoes are received from fish and bottom. The 200 kHz pulses pinpoint fish schools in shallow water, while the 50 kHz pulses are advantageous to search deeper water. The A-scope display helps to evaluate echo strengths of targets in real time. The underwater scene can be displayed in a split screen with course plot or alone on the full size screen. A water temperature graph can be displayed by incorporating an optional water temperature sensor.

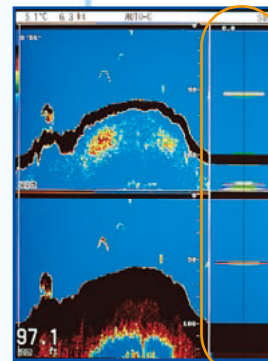


Dual Frequency and A-scope



Bottom Discrimination

A-scope



### SBAS (Satellite-Based Augmentation Systems)

is a general term for a GPS navigation system with differential correction by means of geostationary satellites. In the US, it is called WAAS (Wide Area Augmentation System), whereas in Europe and Japan, it is called EGNOS (European Geostationary Navigation Overlay System) and MSAS (MSAT Satellite-based Augmentation System), respectively.



# SPECIFICATIONS OF GP-3500/3500F

## GPS RECEIVER CHARACTERISTICS

1. **Receiver Type** Twelve discrete channels, C/A code, all-in-view, Integral SBAS receiver processor
2. **Receive Frequency** L1 (1575.42 MHz)
3. **Accuracy** GPS: 10 m (95%)  
DGPS: 5 m (95%)  
WAAS: 3 m (95%)
4. **Time to first fix** 12 seconds typical (Warm start)
5. **Tracking Velocity** 999 kt
6. **Geodetic System** WGS-84, NAD-27, and others
7. **DGPS Capability** Optional internal DGPS beacon receiver kit

## PLOTTER CHARACTERISTICS

1. **Display**  
GP-3500: 10.4" TFT Color LCD, 480(W) x 640(H) pixels  
GP-3500F: 10.4" TFT Color Transflective LCD, 480(W) x 640(H) pixels
2. **Map Scale** 0.125 to 1,024 nm
3. **Latitude Limits** Between 85°N and 85°S
4. **Plot Interval** 1 sec to 99 min 59 sec or 0.01 to 9.99 nm
5. **Display Modes** Course plot, Nav Data, Compass Display
6. **Presentation Modes** TM North-up, Course-up
7. **Memory Capacity** Up to 80,000 points for ship's track points and marks.  
3500 waypoints and 200 planned routes (Max. 35 waypoints/route)
8. **Voyage Planning** Waypoint navigation or route navigation
9. **Alarms** Arrival/anchor watch, XTE, proximity alert, ship speed, depth\*, water temperature\*\*, fish\*\*\*  
\*GP-3500F or Depth sensor required.  
\*\*Temperature sensor required. \*\*\*GP-3500F only.
10. **Interface** (IEC-61162-1, NMEA 0183 ver. 1.5/2.0)  
**Outputs:** AAM, APB, BOD, BWC, DBT\*\*, DPT\*\*, GGA, GLL, MTW\*, RMA, RMB, RMC, VTG, WPL, XTE, ZDA  
**Inputs:** DBT, DPT, HDG, HDM, HDT, GGA, GNS, GLL, MTW, RMA, RMC, TLL, TTM, VHW, VTG, ZDA  
\*Depth sensor required \*\*GP-3500F only
11. **Cartography**  
FURUNO MiniChart, NAVIONICS® Nav-Chart™ or C-MAPNT Chart  
note: Choose from two units that accept either C-MAPNT Charts or Navionics® Nav-Chart™/Furuno MiniCharts when ordering.

## ECHO SOUNDER

1. **Display Modes** Normal (single- or dual-frequency), Bottom-lock, Bottom Zoom, Marker Zoom, A-scope
2. **Frequency** 50 and 200 kHz
3. **Output Power** 600 W/1 kW (specify when ordering)
4. **Basic Ranges** 8 basic ranges customized to max 1200 m
5. **Range Shift** 0 to 1200 m

## ENVIRONMENTAL CONDITIONS (IEC 60945 testing)

1. **Temperature**  
Display Unit: -15°C to +55°C  
Antenna Unit: -25°C to +70°C
2. **Water resistance**  
Display Unit: IPX2 (IEC 60529), CFR46 (USCG)  
Antenna Unit: IPX6 (IEC 60529), CFR46 (USCG)

## POWER SUPPLY

12 - 24 VDC, GP-3500: 25 W, GP-3500F: 30 W

## EQUIPMENT LIST

- |  |        |
|--|--------|
| <b>Standard</b>  |        |
| 1. Display Unit GP-3500/3500F  | 1 unit |
| 2. Antenna Unit GP-017S  | 1 unit |
| 3. Antenna Cable 15 m  | 1 pc   |
| 4. Installation Materials and Standard Spare Parts   | 1 set  |
| <b>Option</b>  |        |
| 1. FURUNO MiniChart Card   |        |
| 2. Remote Controller   |        |
| 3. NMEA Cable 5/10 m MJ-A6SPF0012-050/100  |        |
| 4. Antenna Cable 30/50 m CP20-01700/01710  |        |
| 5. Antenna Mounting Base<br>13-QA330 (Pipe mount), 13-QA310 (Offset bracket), 13-RC5160 (Handrail mount)                           |        |
| 6. Rectifier PR-62 for 115/230 VAC mains   |        |
| 7. Temperature Sensor T-02MSB (GP-3500F)   |        |
| 8. Speed/Temperature Sensor ST-02MSB/ST-02PSB (GP-3500F)   |        |
| 9. Internal DGPS Beacon Receiver Kit GR7000A-3500-NN-019S (including Internal Beacon Receiver Board and DGPS Antenna Unit GP-019S) |        |



## Transducers (Specify when ordering GP-3500F)

### 600 W

- 520-5PSD (Plastic thru-hull), 520-5MSD (Bronze thru-hull), 520-5PWD (Plastic transom), 525ST-MSD (Bronze thru-hull w/speed/temp sensor), 525ST-PWD (Plastic transom speed/temp sensor)

### 1 kW (Optional matching box MB-1000 required)

- 50B-6, 50B-6G, 200B-5, 200B-5S, 50/200-1T, 50/200-12M

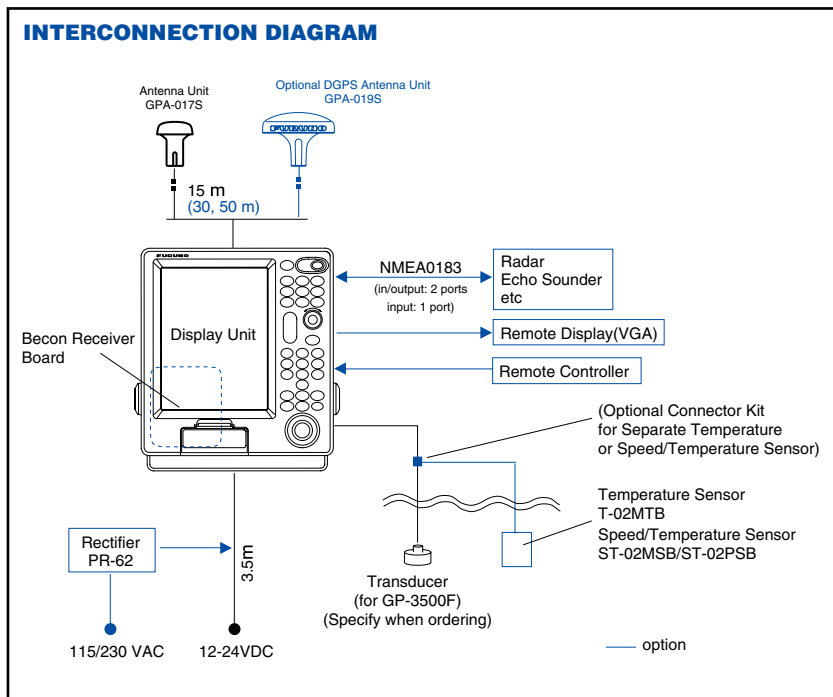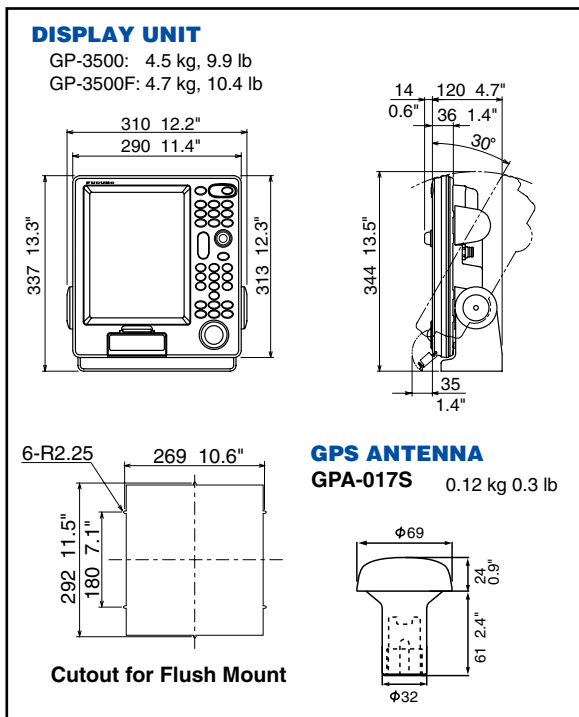

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

**FURUNO ELECTRIC CO., LTD.**  
Nishinomiya, Hyogo, Japan  
www.furuno.com

**FURUNO U.S.A., INC.**  
Camas, Washington, U.S.A.  
www.furunousa.com

**FURUNO (UK) LIMITED**  
Havant, Hampshire, U.K.  
www.furuno.co.uk

**FURUNO FRANCE S.A.S.**  
Bordeaux-Mérignac, France  
www.furuno.fr

**FURUNO ITALIA S.R.L.**  
Gatteo Mare, Italy  
www.furuno.it

**FURUNO ESPAÑA S.A.**  
Madrid, Spain  
www.furuno.es

**FURUNO DANMARK A/S**  
Hvidovre, Denmark  
www.furuno.dk

**FURUNO NORGE A/S**  
Ålesund, Norway  
www.furuno.no

**FURUNO SVERIGE AB**  
Västra Frölunda, Sweden  
www.furuno.se

**FURUNO FINLAND OY**  
Espoo, Finland  
www.furuno.fi

**FURUNO POLSKA Sp. z o.o.**  
Gdynia, Poland  
www.furuno.pl

**FURUNO EURUS LLC**  
St. Petersburg, Russian Federation  
www.furuno.ru

**FURUNO SINGAPORE**  
Singapore  
www.furuno.sg

**FURUNO DEUTSCHLAND GmbH**  
Rellingen, Germany  
www.furuno.de

**FURUNO HELLAS S.A.**  
Piraeus, Greece  
www.furuno.gr

**FURUNO (CYPRUS) LTD**  
Limassol, Cyprus  
www.furuno.com.cy

**FURUNO SHANGHAI CO., LTD.**  
Shanghai, China  
www.furuno.com/cn