

FURUNO

MES

Mobile Earth Station

Model: FELCOM18/19



MES

INMARSAT Mobile Earth Station

*Proven solutions for Inm
fully incorporated SSAS*



Features of FELCOM18

- Inmarsat-C Ship Earth Station terminal for GMDSS application
- Full GMDSS compliance with optional printer and AC/DC power supply
- SSAS capability with SSAS Alert Units
- Compatibility with LRIT application
- Compatible with the following standard:
IMO A.570(14), IMO A.664(16), IMO A.694(17), IMO A.807(19), IMO MSC.147(77),
IMO MSC.36(63), IMO MSC.68(68) Annex 4, IMO MSC.97(73), IMO MSC.263.(84),
MSC/Circ.862, IEC 60945 Ed. 4, IEC 61097-4 Ed. 2, IEC 61162-1 Ed. 4
- A wide variety of communication schemes available: telex, FAX, emailing, EGC, Data reporting/polling, etc.
- SD card for recording media
- GPS receiver (option)

Compatible with:


GMDSS
Global Maritime Distress and Safety System

LRIT
Long-Range Identification and Tracking of ships

SSAS
Ship Security Alert System

Model: FELCOM18

Interconnection Diagram

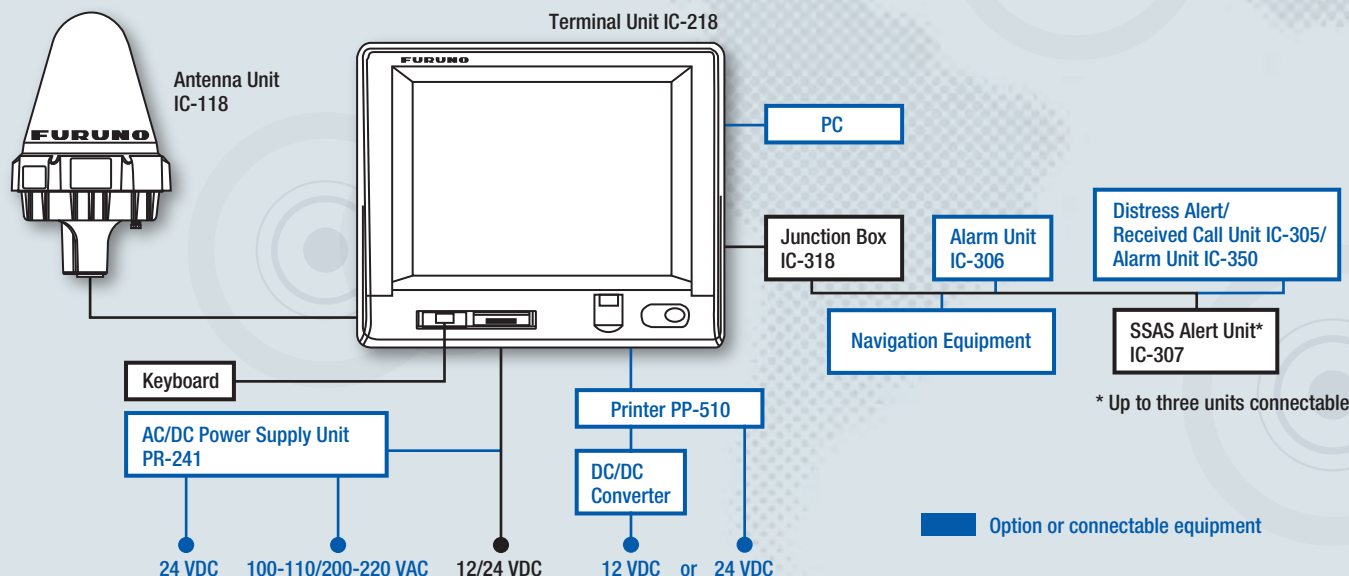

Inmarsat-C/Inmarsat MINI-C services and LRIT capabilities



Compatible with:

LRIT
Long-Range Identification and Tracking of ships


SSAS
Ship Security Alert System

Features of FELCOM19

- ▶ Inmarsat MINI-C Mobile Earth Station terminal
- ▶ Compatibility with LRIT application
- ▶ SSAS capability with SSAS Alert Units
- ▶ A wide variety of communication schemes available: telex, FAX, emailing, EGC (non-GMDSS), Data reporting/polling, etc.
- ▶ GPS receiver incorporated
- ▶ Black-box configuration allows flexible installation

Model: FELCOM19

Interconnection Diagram

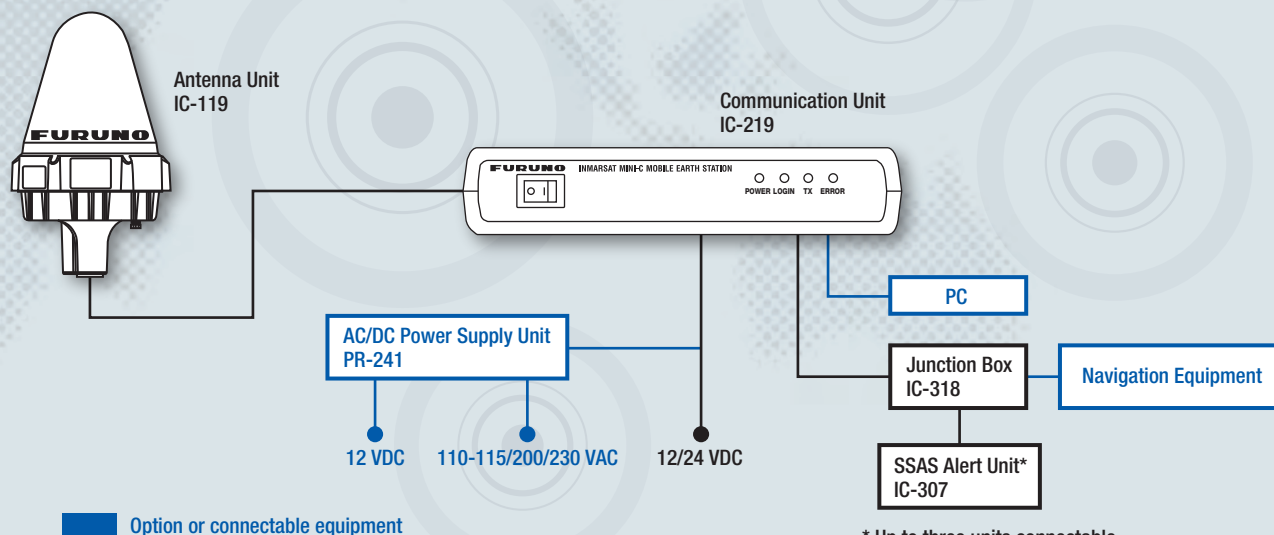

SPECIFICATIONS

Product Name		Inmarsat-C Mobile Earth Station	Inmarsat MINI-C Mobile Earth Station
		FELCOM18	FELCOM19
Frequency	TX:	1626.5-1646.5 MHz	
	RX:	1537.0-1544.2 MHz	
Channel Spacing		5 kHz	
Modulation Rate and format	TX:	600, 1200 sps Unfiltered BPSK	
	RX:	1200 sps Unfiltered BPSK	
Minimum G/T		-23.0 dB/K (at elv. 5°)	
Output Power		12-16 dBW (at elv. 5°)	7-16 dBW (at elv. 5°)
		12-24 VDC	
Power Supply	TX:	less than 130 W	less than 50 W
	RX:	less than 60 W	less than 10 W

EQUIPMENT LIST


Standard	1 Antenna Unit with 30 m cable IC-118	1 unit	1 Antenna Unit with 30 m cable IC-119	1 unit
	2 Terminal Unit with keyboard IC-218	1 unit	2 Communication Unit IC-219	1 unit
	3 Junction Box IC-318	1 unit	3 Junction Box IC-318*	1 unit
	4 SSAS Alert Unit IC-307*	2 unit	4 SSAS Alert Unit IC-307*	2 unit
	5 Installation materials		5 Installation materials	
	*applicable only for SSAS specification		*applicable only for SSAS specification	
Option	1 Distress Alert/Received Call Unit IC-305		1 AC/DC Power Supply Unit PR-241	
	2 Alarm Unit IC-306		2 SSAS Alert Unit IC-307**	
	3 AC/DC Power Supply Unit PR-241		3 Junction Box IC-318**	
	4 GPS Board Kit		4 Printer PP-520	
	5 SSAS Alert Unit IC-307**		**applicable only for non-SSAS specification	
	6 Printer PP-520			
**applicable only for non-SSAS specification				

ENVIRONMENT

Temperature	Antenna Unit	-35 to +55°C (Storage: +70°C)
	BDE	-15 to +55°C
Relative Humidity		40°C 95%
Degree of protection	Antenna Unit	IP56
	Terminal Unit	IP22
	Printer/Keyboard	IPX0
	Others	IP22 (bulkhead mount)
Vibration		IEC 60945 Ed.4


Communication Unit

IC-219
1.2 kg 2.65 lb




Terminal Unit

IC-218
4.2 kg 9.26 lb




Junction Box

IC-318
weight: TBC

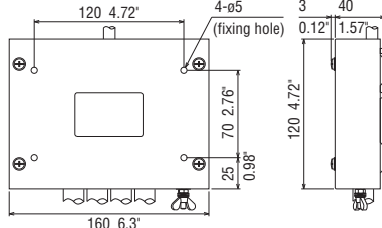


Distress Alert/Received Call Unit

IC-305
0.35 kg 0.77 lb




Antenna Unit

IC-118/IC-119
1.4 kg 3.09 lb

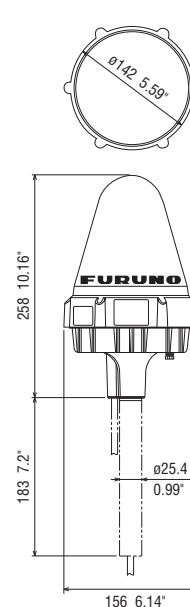


Printer

PP-520
4.8 kg 10.6 lb




SSAS Alert Unit

IC-307
0.35 kg 0.77 lb

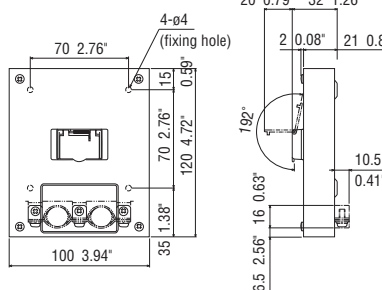

Alarm Unit

IC-306
0.33 kg 0.7 lb



Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.
Japan | www.furuno.com
FURUNO U.S.A., INC.
U.S.A. | www.furunousa.com
FURUNO PANAMA S.A.
Republic of Panama | www.furuno.com.pa
FURUNO (UK) LIMITED
U.K. | www.furuno.co.uk
FURUNO NORGE A/S
Norway | www.furuno.no

FURUNO DANMARK A/S
Denmark | www.furuno.dk
FURUNO SVERIGE AB
Sweden | www.furuno.se
FURUNO FINLAND OY
Finland | www.furuno.fi
FURUNO POLSKA Sp. Z o.o.
Poland | www.furuno.pl
FURUNO DEUTSCHLAND GmbH
Germany | www.furuno.de

FURUNO FRANCE S.A.S.
France | www.furuno.fr
FURUNO ESPAÑA S.A.
Spain | www.furuno.es
FURUNO ITALIA S.R.L.
Italy | www.furuno.it
FURUNO HELLAS S.A.
Greece | www.furuno.gr
FURUNO (CYPRUS) LTD
Cyprus | www.furuno.com.cy

FURUNO EURUS LLC
Russian Federation | www.furuno.ru
FURUNO SHANGHAI CO., LTD.
China | www.furuno.com/cn
FURUNO CHINA CO., LTD.
Hong Kong | www.furuno.com/cn
FURUNO KOREA CO., LTD
Korea
FURUNO SINGAPORE
Singapore | www.furuno.sg

PT FURUNO ELECTRIC INDONESIA
Indonesia | www.furuno.id
FURUNO ELECTRIC (MALAYSIA) SND. BHD.
Malaysia | www.furuno.my

D-2103LB
Catalogue No. CA00001501