


Specifications

FURUNO


Model Name	WR2120
Antenna Polarization	Dual Polarimetric (Horizontal and Vertical) Simultaneous Transmission/Receiving
Operating Frequency	9.4 GHz band
Pulse Width	0.5-50 us
Pulse Repetition Frequency(PRF)	2000 Hz max.
Beam Width	2.7° (both horizontal and vertical beams)
Peak Output Power	100 W (both horizontal and vertical beams)
Vertical Scan Angle	-2 to 182 degrees (adjustable)
Antenna Rotation Speed	0.5-10 rpm (adjustable)
Observation Range	70 km max.
Scan Modes	PPI, Volume Scan, Sector PPI, Sector RHI
Output Parameters	Reflectivity factor Zh (dBZ), Doppler velocity V (m/s), Doppler velocity width W (m/s), Cross polarization difference phase α_{dp} (deg), Specific differential phase KDP (deg/km), Correlation coefficient between two polarizations, Horizontal and Vertical Differential reflectivity ZDR (dB), Rainfall intensity R (mm/h)
Doppler Speed	+/-64 m/s
Available Data Formats	CF/Radial, Opera Odim HDF5, CF-compliant NetCDF (rain only) Grib2 (rain only)
Operating Temperature	-10 to +50°C (Start-up), -20 to +50°C (In operation)
Maximum Wind Survival Speed	90 m/s
Power Supply	100-240 VAC, Single Phase, 50/60 Hz
Power Consumption	650 W max., 470 W typ.
Sensitivity-reflectivity	Typ. 22 dBZ@50 km @Q0N 50 us 2 MHz (SNR = 4dB)
Gain	≥ 33.0 dBi
Transmitter Type	Solid state

Antenna Unit WR2120-ATU
65 kg 143.3 lb




It can also be carried through narrow spaces (800 mm) if disassembled.


Signal Processing Unit WR2120-SPU
45 kg 99 lb

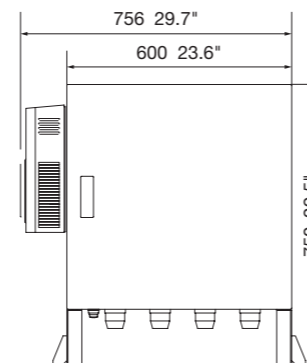

Data Processing Unit WR2120-DPU
2.2 kg 4.5 lb



System Configuration

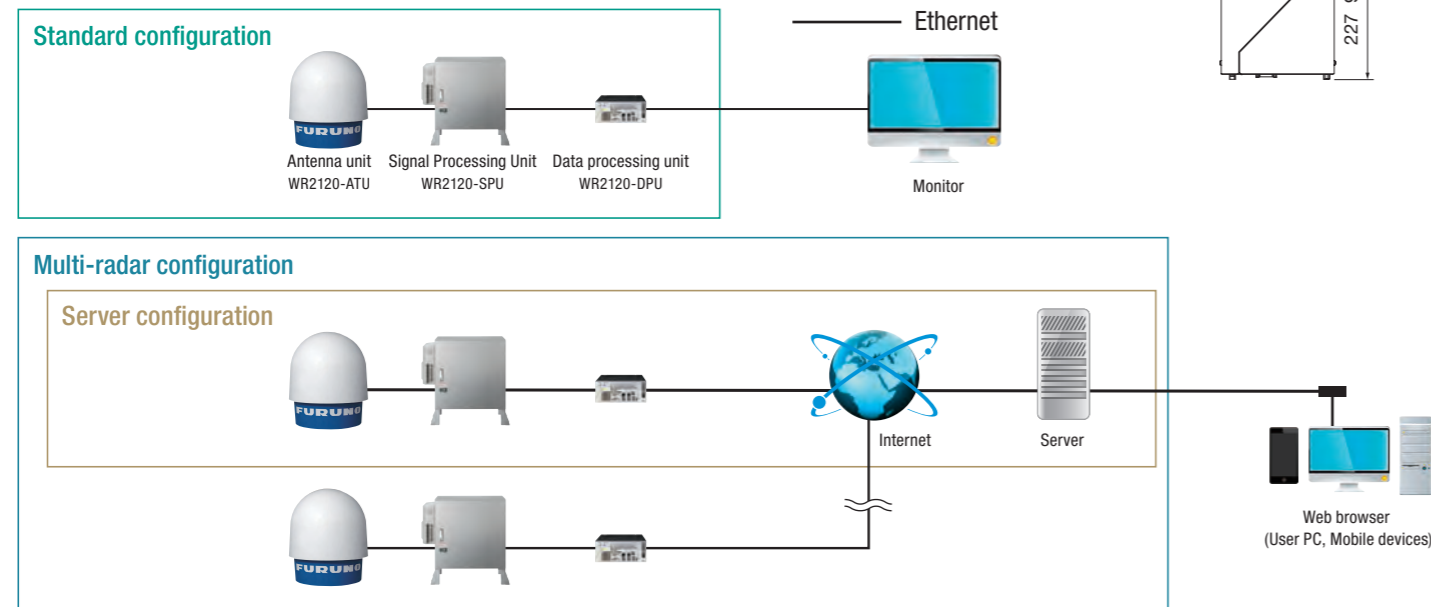

Compact X-band Dual Polarimetric Doppler Weather Radar

SOLID STATE



Model **WR2120**

Dual polarimetry for High performance!

Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.
Japan | www.furuno.com
FURUNO U.S.A., INC.
U.S.A. | www.furunousa.com
FURUNO PANAMA S.A.
Republic of Panama | www.furuno.com.pa
FURUNO (UK) LIMITED
U.K. | www.furuno.co.uk
FURUNO NORGE A/S
Norway | www.furuno.no

FURUNO DANMARK A/S
Denmark | www.furuno.dk
FURUNO SVERIGE AB
Sweden | www.furuno.se
FURUNO FINLAND OY
Finland | www.furuno.fi
FURUNO POLSKA Sp. z o.o.
Poland | www.furuno.pl
FURUNO DEUTSCHLAND GmbH
Germany | www.furuno.de

FURUNO FRANCE S.A.S.
France | www.furuno.fr
FURUNO ESPAÑA S.A.
Spain | www.furuno.es
FURUNO ITALIA S.R.L.
Italy | www.furuno.it
FURUNO HELLAS S.A.
Greece | www.furuno.gr
FURUNO (CYPRUS) LTD
Cyprus | www.furuno.com.cy

FURUNO EURUS LLC
Russian Federation | www.furuno.ru
FURUNO SHANGHAI CO., LTD.
China | www.furuno.com/cn
FURUNO CHINA CO., LTD.
Hong Kong | www.furuno.com/cn
FURUNO KOREA CO., LTD
Korea
FURUNO SINGAPORE
Singapore | www.furuno.sg

PT FURUNO ELECTRIC INDONESIA
Indonesia | www.furuno.id
FURUNO ELECTRIC (MALAYSIA) SND. BHD.
Malaysia | www.furuno.my

1-B-1909PDF
Catalogue No. CA000001370

www.furuno.com




Dual Polarization Vertical / Horizontal



For Various Situations

High Precision Rain Observation & Accurate Measurements


Single Polarization

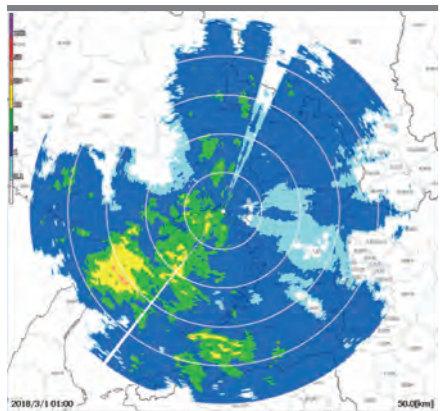

Standard measurement


The Dual Polarization of the WR2120 recovers signal intensity loss and attenuation caused by heavy rain, see above example.

Dual Polarization

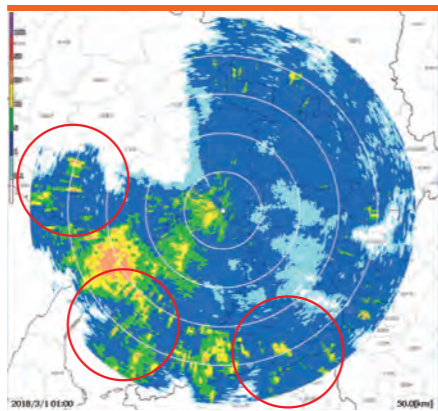

Compensates Rain intensity loss

Particles Classification

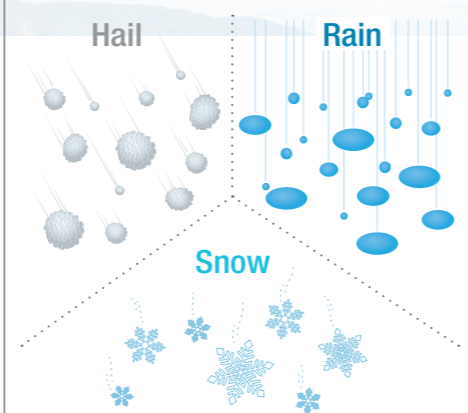

- Particle Uniformity Assessment
- Aspect Ratio Measurement

Several data such as echo strength or phase difference, provided by the WR2120, can be utilized to assess the nature of the detected particle and deduct whether it is Snow, Hail or Rain.

Several different locations

Cities

Local weather observation capabilities for optimal wastewater treatment efficiency, increased public safety and minimizing property loss through enhanced flood damage prevention control.

Airports

Observation and identification of approaching rainfall/snowfall around airports for improved traffic management and safety.

Mountains

Observation of rainfalls and their effect in mountainous areas allowing easier prediction of water flows for disaster prevention.

Safe relocation, easy transportation

Wide range of transportation choices

Pickup, Trailer, Small trucks...



Heading sensor for azimuth adjustment*

Vibration isolator for safe relocation and transport*

MIL-STD-810G Test Method 514.7 ANNEX C Category 4 Secured Cargo, Common carrier (US highway truck vibration exposure) Test1

WR2120 case for easy transportation*

WR2120 on a trailer (example) *Option

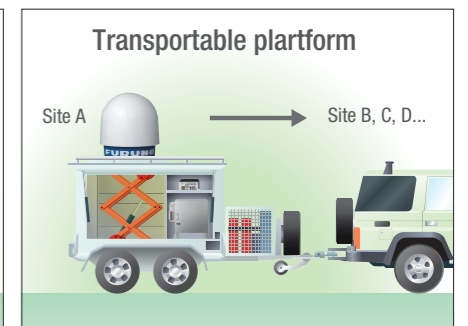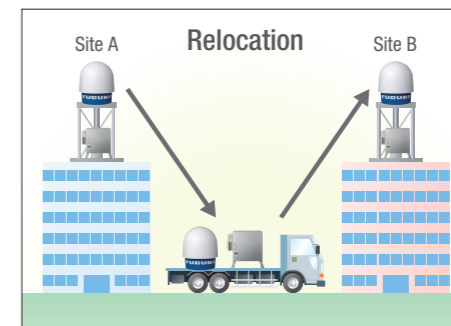

Various software applications available



Rainnaut (Paid service)

- Easy monitoring with our standard WR2120 visualization software

Various data format compatibilities

- Various data formats used in major software packages, such as **Baron Lynx** and **Vaisala IRIS Focus**, are available

Reduced Operating Costs

Solid-State

- Reliable, less maintenance, long life solid-state transmission device
- Lower power consumption

Radar status monitoring for optimized performance

Easy Installation

- Very Compact and lightweight (1 m, 65 kg)
- No heavy equipment required for installation
- Compatible with regular power outlet

Carbon Fiber Antenna Dish


- Reduction of the antenna weight
- Reduction of damage and mechanical stress due to shocks and vibrations



Large Radars (S/C-Band) supplement

The WR2120 can supplement, reinforce and fill-in areas conventional S/C-Band Radars cannot reach.


*Example diagram of an efficient combination using WR2120 X-Band Radar to detect local weather changes with high precision in lower elevation areas while large S/C band radars sweep higher elevations for longer range observation.

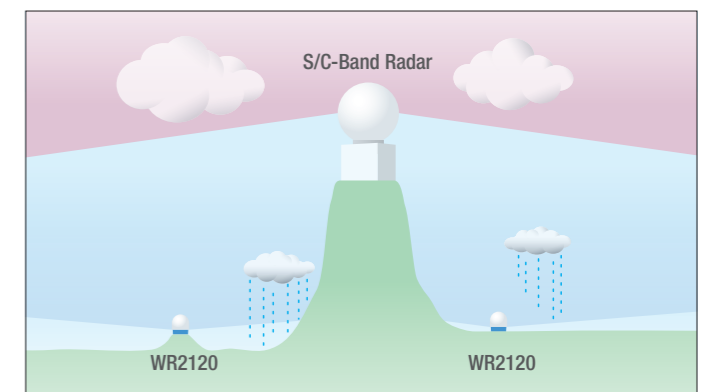

Multi-Radar Configuration

Multi-radar configuration for higher precision and reduced blind areas

- High precision measurements
- Reduced blind areas

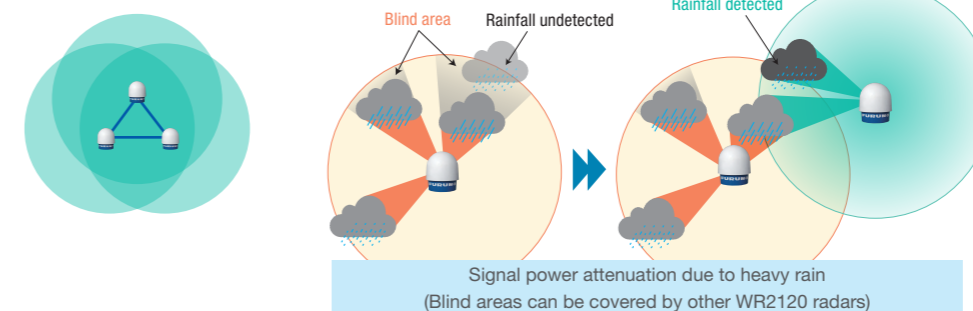

Multi-radar configuration for increased observation range

