

**FURUNO**

# Stabilized FISH SIZE INDICATOR

Model **FCV-38**

*Stable echo presentation in  
all sea conditions!*



Photo : 19" Marine Display MU-192HD (Customer supply)



More details on  
[www.furuno.com](http://www.furuno.com)





# *Optimize your fishing operation with detection and Split-beam technology*

The FCV-38 is a high performance 4 kW fish finder with a 38 kHz transducer using split beam technology that provides excellent depth detection capability. It also contributes to reliable fish size estimation.

In addition, it provides accurate information on fish schools and the seabed, even in stormy weather, thanks to a unique beam stabilizer.

**Stabilized FISH SIZE INDICATOR**

Model **FCV-38**



**Multi-directional beam transmission and reception provides simultaneous search and display in a maximum of five directions**

**Unique detection capabilities and stable image offered by a built-in motion sensor**

**With connection to a SATELLITE COMPASS™, constant stable display of echoes is achievable with the use of the heave offset function**

**Fish size graph (max. 3) allows estimation of fish distribution at a glance**

**Target graph allows tracking of a designated fish target**



# *tion with Multi-direction hnology*

**| Capable of output scientific data in netCDF4 format and calibration**

**| Long range detection in the deep sea, capable of 1,500 m depth**

**| Net sensor information\* can be shown on the display**

\* Compatible models: TE-155 (Marport), TS-337A (Imaginex) and TI System (Simrad)

**| Hardness and roughness graph allows monitoring of the seabed  
hardness and roughness**

**| Scroll-back mode allows the user to review past data**

**| Data recording and screenshot function allow easy review of past echoes  
and recordings**





## Echo images from 5 different directions received simultaneously with the multi-beam system


The FCV-38 can detect school of fish in five directions at once and provides information on the location of the targeted fish in relation to the vessel. The operator can adjust the five beams in any direction within a 20 degree range in the menu settings.

For five beam transmission, you can freely activate or deactivate simultaneous transmission and adapt it to your needs by using three types of split-beam mode\* in the setting menu: Alternating transmission, Semi-simultaneous and simultaneous transmission.


Semi-simultaneous transmission is new function which limits beam-to-beam interference and makes the seabed easier to identify than with the simultaneous beam transmission mode.

The timing of the transmission has been optimized to accelerate the transmission cycle of the beam even with 5 beams.

\*The screen is drawn faster in this mode, however unwanted echoes (false seabed echoes) may appear.

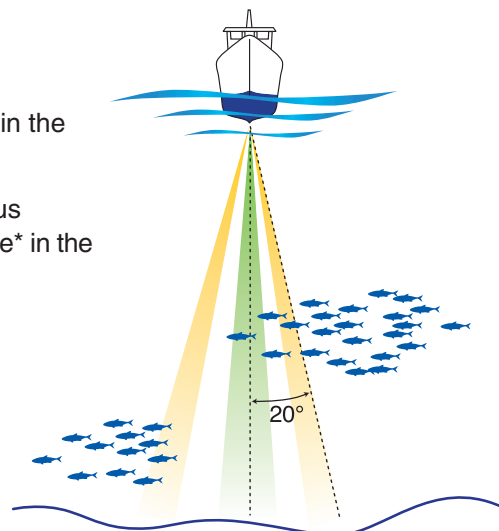

### Alternating transmission




Five beams are alternately transmitted

Menu setting:

Off

New


### Semi-simultaneous transmission



Some beams are simultaneously transmitted

Auto

### Simultaneous transmission



Five beams are transmitted in succession

On



## Built-in motion sensor provides a stabilized target presentation in rough sea conditions

### Pitching and rolling compensation


Pitching and rolling produces adverse effect not only on the sounding image, but also on measurement of fish size. With FURUNO exclusive Stabilizer Technology, the FCV-38 can stabilize both TX and RX beams independently so that the picture will remain accurate.

#### Stabilizer ON




Stabilizer keeps the beam on the designated target.

#### ON

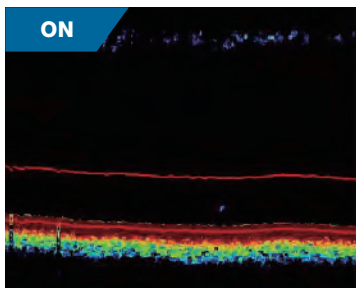


#### Stabilizer OFF

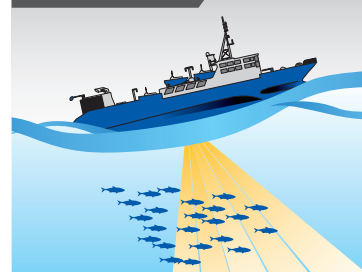

A beam affected by pitching and rolling fails to detect the target fish.

#### OFF

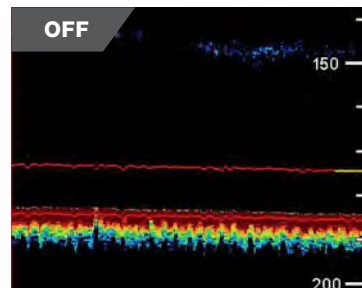




# Accurate fish size measurements in easy-to-understand graph form\*

The FCV-38 measures the size of fish in the selected area, and displays the information in a graph that can be understood at a glance. The split-beam technology has improved the accuracy and reliability of fish size measurements and graphs (max. 3).

By analyzing the size, volume and movement of a targeted school of fish, operators can easily decide what to catch and what not to catch. It is indispensable for deciding when to go for a catch and eliminate a school of fish that are smaller than desired. In addition, it greatly contributes to the management and study of fisheries resources.

\* Fish length is a reference value calculated from reflection intensity.

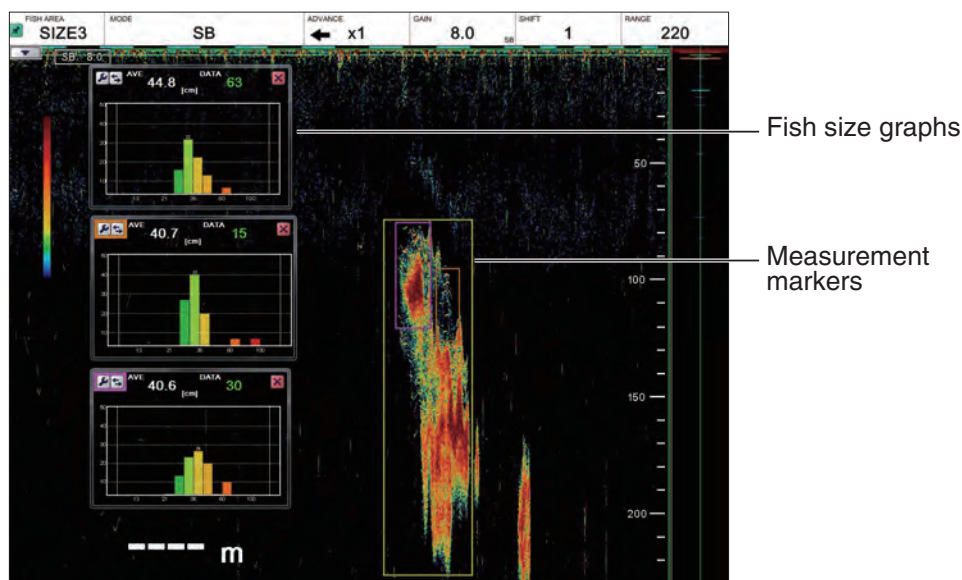

FCV-38 has four methods of fish size measurement. You can select your favorite measurement method from InstantAccess bar™ by just clicking on the menu button.

- [Entire Area] Measure of all detected fish
- [Specific Range] Measures the detected fish within a specific depth
- [Bottom Trace] Measures the detected fish near the bottom
- [Specific Area] Measures the detected fish within the area specified


The fish size measurement function includes particularly useful tools to help the user keep track of targets. For example, the tool [Auto Depth] automatically adjusts the depth of the measurement area until more fish are detected if the target fish has fallen below the set limit or has left the measurement area. The tool [Auto Area] can be used to automatically move and adjust the measurement area to areas with a large number of single fish.

## Fish size graph

The fish size graph shows fish size within a user-selected measuring area. The bar graph shows size and proportion of fish in the measuring area selected.

**Overall average size of fish detected.**

**Number of sample**

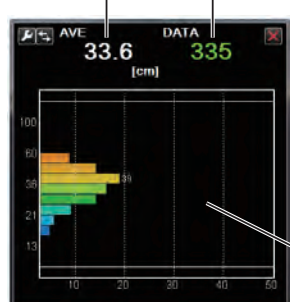

Fish size graph

The graph shows both the peak fish size (the size of the largest fish) and the average size of the fish in the measurement area, which is useful for estimating the abundance and quality of fish in the target school.

**First peak**

Estimated fish length which occupies the highest percentage in the measurement area.

## Target graphs

The target graphs plot, within a circle representing the target measurement range, the locations of individual fish in relation to your vessel. Two types of graphs, vertical and horizontal are available.




Vertical graph

**Own Ship icon**



## Zoom Modes

Zoom displays enlarge the specified area of the split-beam display. This mode allows you to learn more about the sea floor and the density of schools of fish. The four modes are bottom lock, bottom zoom, marker zoom, and bottom discrimination. The expansion range is available from 2m to 200m depth. You can also freely change the window size by dragging and dropping the window frame.

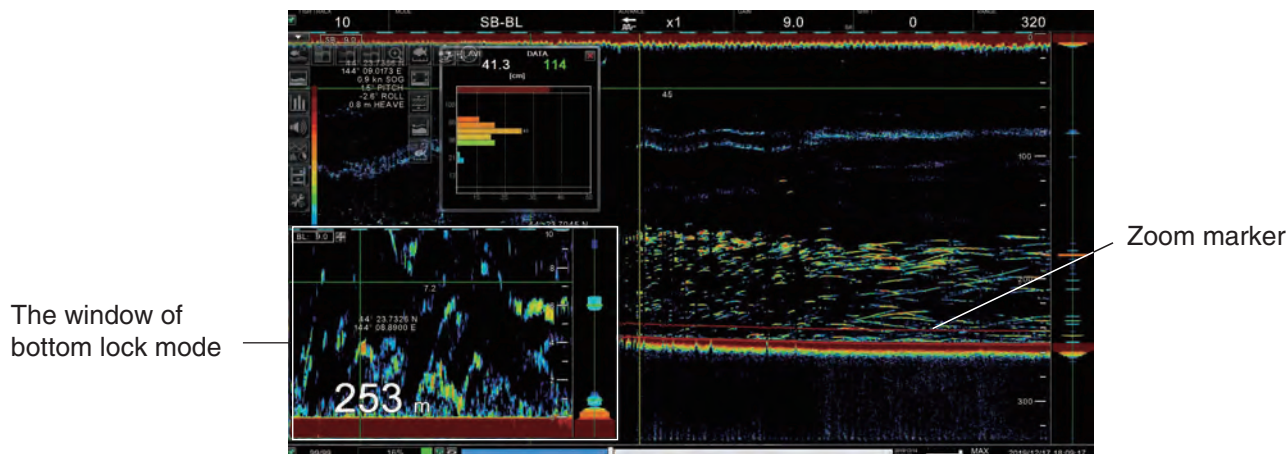

## Screenshots and echo data can be recorded and play back

A maximum of 99 screenshots can be saved on the processing unit. You can also replay the echo display at any time if you wish to see it again. This is helpful in comparing the sizes of schools of fish. For external memory devices\*, the number of files that can be saved depends on the capacity of the device.



Scroll back mode\* allows you to view past screens of fish finder images, making it handy for comparing the sizes of schools of fish close to each other.

\* All echoes stop when the scroll back mode is activated.



## Easy and quick operation

The FCV-38 can be operated easily and quickly with its trackball. The screen header also contains Range, Shift, Sensitivity, Image Feed, and Display Mode menus that can be immediately accessed when required. Other functions can also be accessed immediately by setting them in the InstantAccess bar™ as desired\*.

\* Up to 10 icons can be set in the InstantAccess bar™.



Trackball control unit




InstantAccess bar™



## Scientific data output

The output of scientific data in netCDF4 format will contribute to fish stock assessment etc. Data analysis software that can read data in netCDF format is currently being developed in some institutes\*.


\*We recommend to check with the nearest dealer.

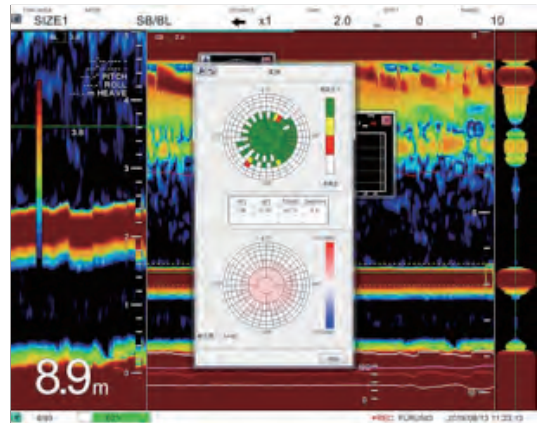

## Calibration

Calibration is mandatory for acoustic resource surveys. Thanks to a more accurate calibration function and an improved user interface, you can easily check the status of the data acquisition. In addition, the detection zone, its progress and completion can be viewed at a glance on the calibration screen.

### SYSTEM CONFIGURATION

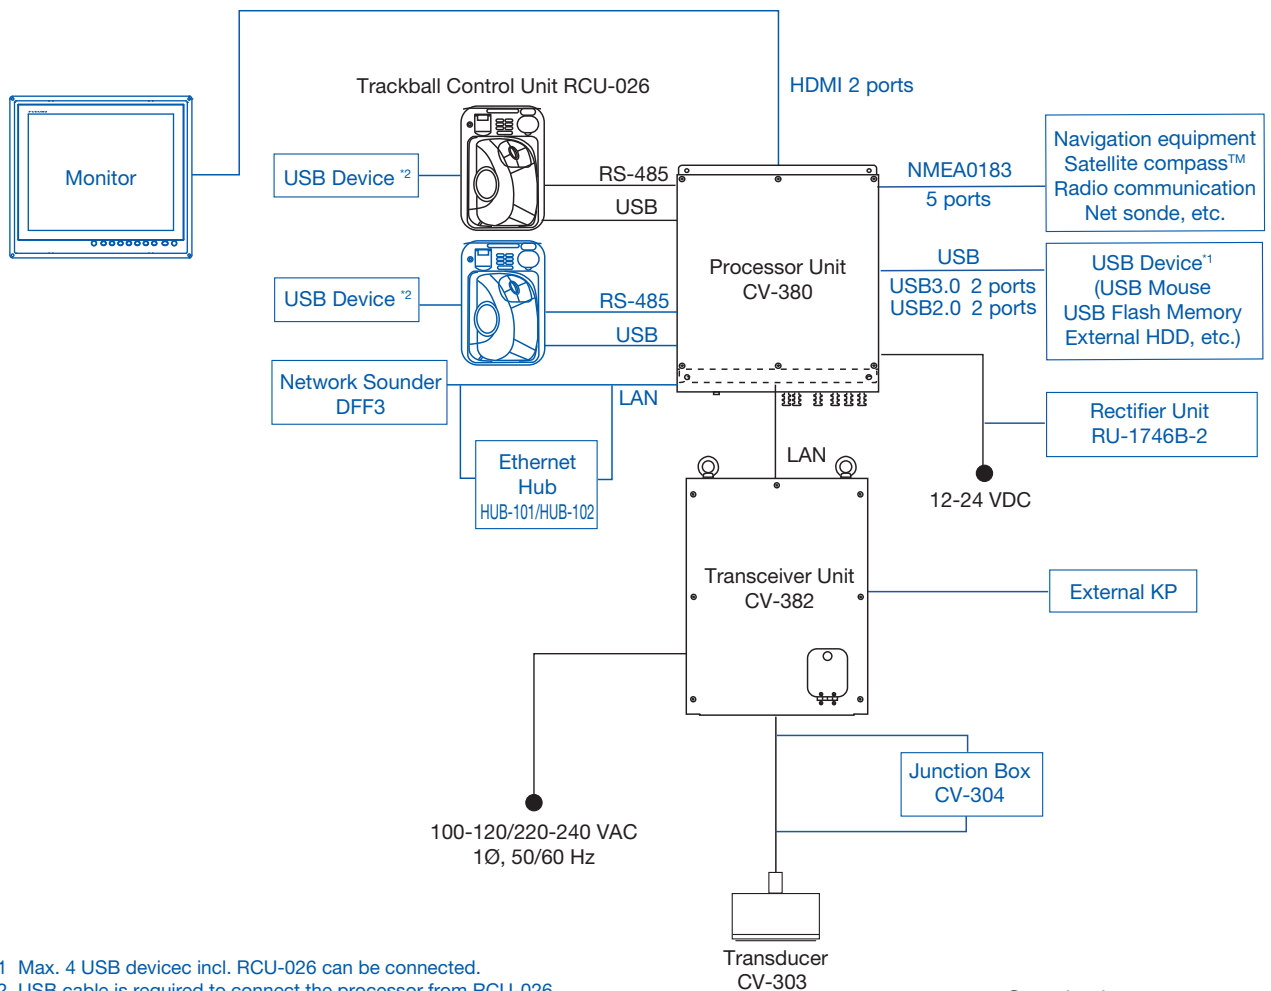

\*1 Max. 4 USB devices incl. RCU-026 can be connected.

\*2 USB cable is required to connect the processor from RCU-026

To extend the cable from Processor, please use the optional DV/USB repeater.

—— Standard  
—— Optional or local supply



**GENERAL**

Transmitting frequency	38 kHz
Output power	4 kW
Number of channel	64 ch
Transmitting mode	CW/FM
Transmit rate	1200 pulse/min.max.
Beam control range	Bow/stern, port/stdb within 20°

**PROCESSOR UNIT**

Display range	10 to 3000 m
Range shift	2000 m max.
Expansion range	2 to 200 m
Display mode	Single, Multi-beam combination, Zoom, External fish finder combination
Zoom display	Bottom zoom, Bottom lock expansion, Marker zoom, Discrimination zoom
Advance speed	Freeze, 1/16, 1/8, 1/4, 1/2, 1, 2, 4, 8, 16 (Lines/TX)
Fish size histogram	Display three points simultaneously
Alarm	Bottom, Fish, Bottom fish, Water temperature, Fish size histogram
Language	English (UK/US), Japanese
Display function (commercial monitor required)	
Resolution	1920 x 1200 (WUXGA), 1920 x 1080 (FHD), 1600 x 1200 (UXGA), 1024 x 1280 (SXGA), 1024 x 768 (XGA)
Video output	2 ports, HDMI (Type-A)
Colors	64/16 (Echo)

**INTERFACE**

Number of ports of Processor Unit	
Serial	5 ports, NMEA0183 Ver.1.5/2.0/3.0
LAN	2 ports (for transceiver unit, external sounder/maintenance) Ethernet, 10/100/1000Base-T
USB	USB2.0: 2 ports, USB3.0: 2 ports.
Data Sentences	GGA, GLL, GNS, MTW, VHW, VTG, ZDA, GPatt, GPPhve, pirq, IIDAD, IIDBS, IIHFB, IIMTW, IITPC, IITPT, MPMSD, pirq, SDDBS, SDFnz
Output	DBS, DBT, DPT, MTW, TLL, SDbhr, SDflg, SDmrk, pidat

**POWER SUPPLY**

Processor unit	12-24 VDC, 4.0-2.0 A
Transceiver unit	100-120/200-240 VAC: 5 A max, 1 phase, 50/60 Hz

**ENVIRONMENTAL CONDITIONS****Ambient temperature**

Processor unit	-15°C to +55°C (storage: -15°C to +70°C)
Transceiver unit	-10°C to +45°C (storage: -15°C to +70°C)
Control unit/Junction box	-15°C to +55°C
Transducer	-5°C to +35°C
Relative humidity	93% or less at +40°C

**Degree of protection**








Processor/Transceiver unit	IP22
Control unit	IP22 (IPx0 w/o USB port cover)
Junction box	IP20
Transducer	IPX8
Vibration	IEC60945 Ed.4

**EQUIPMENT LIST****Standard**

1.Processor Unit CV-380	1 unit
2.Transceiver Unit CV-382	1 unit
3.Trackball Control Unit RCU-026	1 unit
4.Transducer CV-303	1 unit
5.Thru-Hull Pipe TFB-1600	1 unit
6.Installation Materials	1 set

**Option**

- 1.Junction Box CV-304-10/20/50 (with 10/20/50 m cable)
- 2.Rectifier Unit RU-1746B-210 or AC/DC Power Supply Unit PR-241
- 3.HDMI cable for Processor Unit-Display Unit (10.3/5.3 m)
- 4.Cable Assembly for Trackball Control Unit
- 5.LAN Cable for DVI/USB repeater (30/50/100 m)
- 6.Flush Mount for Trackball Control Unit
- 7.Transducer Fixing Kit
- 8.Installation Materials

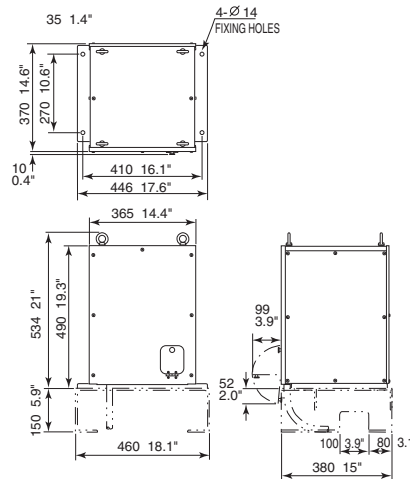**Processor Unit (Blukhead/Tabletop Mount)  
CV-380****7.6 kg 16.8 lb****Trackball Control Unit  
RCU-026****Tabletop Mount 1.4 kg 3.1 lb****Transceiver Unit (Floor mount)  
CV-382****33 kg 72.8 lb****Fixture Mount  
1.5 kg 3.3 lb****Flush Mount  
1.5 kg 3.3 lb****Junction Box (Blukhead Mount)  
CV-304****1.6 kg 3.5 lb****TRANSDUCER  
CV-303****40 kg 88.2 lb**

Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

