



Model: FELCOM20

FEATURES OF FELCOM20

- ▶ Inmarsat-C Ship Earth Station terminal for GMDSS application
 - ▶ Enables versatile communication such as E-mail, Telex, Fax, EGC (Enhanced Group Call), and data reporting/polling
 - ▶ Operable via touch panel and keyboard
 - ▶ Intuitive icon-based interface for easy operation
 - ▶ Compatible with the following optional units:
 - Distress Alert / Received Call Unit IC-305
 - Alarm Unit IC-306
 - SSAS Alert Unit IC-307
 - Junction Box IC-318
 - Printer PP-520
 - ▶ Optional printer (PP-520) required to meet EGC receiver performance standards
 - ▶ Compliant with the latest IMO performance requirements and IEC testing standards
 - ▶ Compliant with GMDSS, LRIT, and SSAS*
- *The optional SSAS Alert Unit (IC-307) is required to meet the performance requirements of the SSAS function.

SPECIFICATIONS


Product Name	Inmarsat-C Mobile Earth Station
Transmitting Frequency	1626.5 - 1646.5 MHz
Receiving Frequency	1537.0 - 1544.2 MHz
Channel Interval	5 kHz
Transmit Modulation Rate and Method	600, 1200 sps Unfiltered BPSK
Receive Modulation Rate and Method	1200 sps Unfiltered BPSK
Receiving Performance Index (G/T)	-23 dB/K or higher (at elv. 5°)
Transmit EIRP	12 - 16 dBW (at elv. 5°)
Power Supply	12-24 VDC

ENVIRONMENT

Temperature Antenna Unit	-35 °C to + 55 °C
Temperature Shipboard Equipment	-15 °C to + 55 °C
Relative Humidity	95% at 40°C


Antenna Unit

IC-120
1.5 kg 3.31 lb




Terminal Unit

IC-220
Tabletop Mount 4.1 kg 9.04 lb

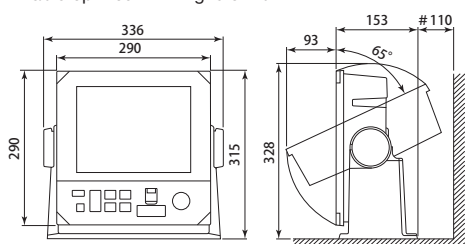


Distress Alert / Received Call Unit

IC-305
0.34 kg 0.75 lb




Alarm Unit

IC-306
0.33 kg 0.73 lb




SSAS Alert Unit

IC-307
0.35 kg 0.77 lb



Junction Box

IC-318
0.75 kg 1.65 lb




EQUIPMENT LIST

	Item Name	Model No.	Quantity
Standard	Antenna Unit	IC-120	1
	Terminal Unit	IC-220	1
	Junction Box	IC-318	1
	SSAS Alert Unit	IC-307*	2
	Keyboard		1
	Installation Materials		1 set
Option	GNSS Antenna Unit	GPA-022S	-
	Distress Alert / Received Call Unit	IC-305	-
	Alarm Unit	IC-306	-
	SSAS Alert Unit	IC-307	-
	Printer	PP-520	-
	AC/DC Power Supply Unit	PR-241	-


*Included in standard configuration only for SSAS specification.

INTERCONNECTION DIAGRAM

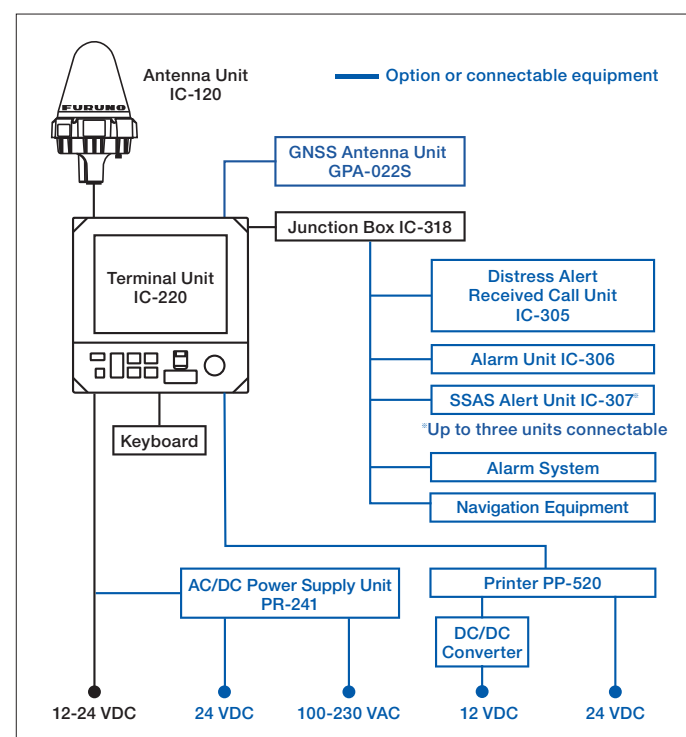

Printer

PP-520
4.8 kg 10.58 lb



Beware of similar products

The brand, product names, trademarks, registered trademarks, or service marks mentioned in this document belong to their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.

www.furuno.com

Find your local contact point

